

PDF10

DIFFUSER

DESCRIPTION:

The PDF10 diffuser, in full stainless steel construction, is used at the outlet of steam / air trap discharging to atmosphere. The diffuser reduces noise levels, velocity of condensate flow / splashing induced erosion.

FEATURES:

- Complete stainless construction.
- Compact design.
- Long life

SIZES: DN15, 20

CONNECTIONS:

Screwed (NPT/BSPT/BSP)
Socket Weld.

LIMITING CONDITIONS:

Suitable for traps rated upto PN63.

INSTALLATION:


Installed on the downstream of the trap with outlet pointing downwards. Ensure that discharge is towards the ground or a safe enclosed space.

HOW TO ORDER:

PDF10 DN15 BSP

ORDERING INFORMATION:

- 1) Size & Model
- 2) End Connection

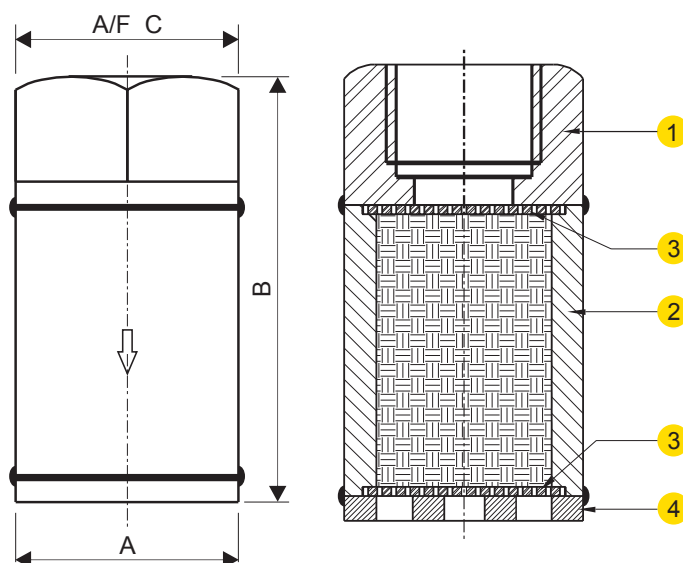

MATERIAL:

No.	PART	MATERIAL	QTY. (Nos.)
1.	END CONNECTOR	AISI 304	01
2.	BODY	AISI 304	01
3.	BAFFLE	AISI 304	02
4.	END PLATE	AISI 304	01

DIMENSIONS - Nominal in mm

SIZE	A	B	C	Wt. (kg)
DN15	34	65	32	0.22
DN20	34	70	36	0.25